




LP182*182-M-54-MH

Rated Power 400-415W



Bifacial

Energie naší hvězdy

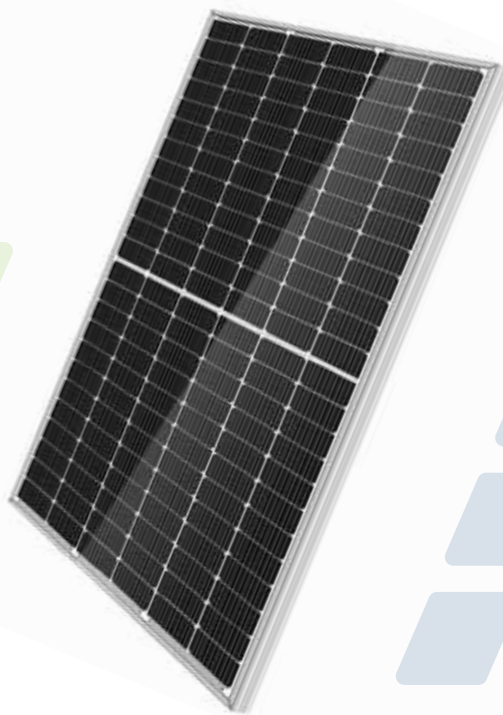

- No risk of spontaneous detonation
- Bifacial Module is 30% lighter than Dual-Glass Module
- Bifacial cells, provide an additional output
- Ability to breathe, The inner CH3COOH can be released

MBB Cell
New circuit design, lower internal current, lower internal resistance loss.


Low Light Features
Higher performance under low light environment.

Higher Output Power
Module adopts 182*182mm half cells, bifacial module provide an additional 5%~25% output.

PID Protection
Ensure the attenuation probability caused by PID phenomenon is minimized.

Harsh Environmental Adaptability
Strict salt spray and ammonia corrosion test by TUV Nord.

Load Capacity
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.

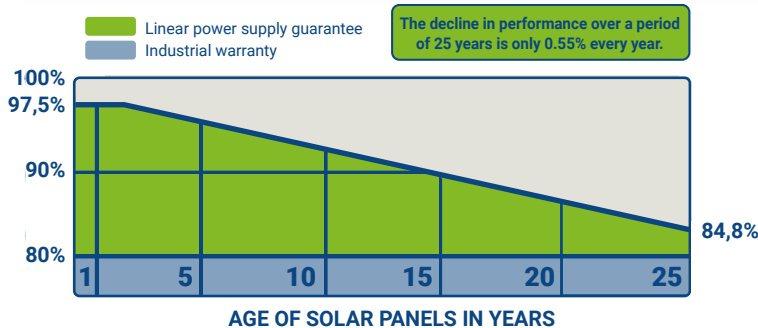

7ma s.r.o.

Tiskárenská 440
672 01 Moravský Krumlov

INSTALACE A INFORMACE

☎ 771 111 122
✉ info@7ma.cz


OBCHOD A OBJEDNÁVKY

☎ 771 111 115
✉ obchod@7ma.cz

WEB a E-SHOP

[WWW.7ma.cz](http://www.7ma.cz)

MECHANICAL DIAGRAMS

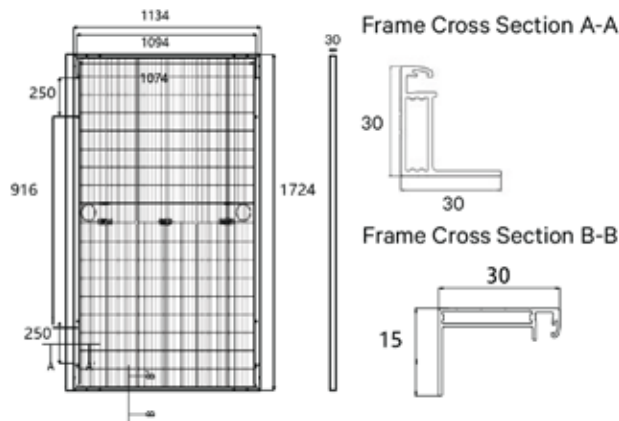

SPECIFICATIONS

Weight	21kg
Dimensions	1724mm*1134mm*30mm
Cell Dimensions	182*182mm
Cell Amount	54*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Frame	Aluminum Alloy
Cable	4mm ² , N 1100mm/P 1100mm or customized length
Connector	MC4 compatible
Application Level	Class A
Bifaciality	70±5%

ELECTRICAL PARAMETERS AT STC

Power	400W	405W	410W	415W
Open Circuit Voltage	36.94V	37.14V	37.34V	37.54V
Short Circuit Current	13.60A	13.65A	13.70A	13.75A
Maximum Power Voltage	30.92V	31.12V	31.32V	31.62V
Maximum Power Current	12.94A	13.00A	13.06A	13.12A
Module Efficiency	20.46%	20.72%	20.97%	21.27%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL PARAMETERS AT NMOT

Power	295W	298W	302W	306W
Open Circuit Voltage	34.49V	34.69V	34.89V	35.09V
Short Circuit Current	10.70A	10.75A	10.80A	11.00A
Maximum Power Voltage	28.78V	28.98V	29.18V	29.38V
Maximum Power Current	10.25A	10.28A	10.35A	10.40A
Module Efficiency	15.09%	15.24%	15.45%	15.66%

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

ELECTRICAL PARAMETERS (AT 10% BIFACIAL POWER OUTPUT)

Output Power	440W	446W	451W	457W
Open Circuit Voltage	36.94V	37.14V	37.34V	37.54V
Short Circuit Current	14.96A	15.02A	15.07A	15.13A
Maximum Power Voltage	30.92V	31.12V	31.32V	31.62V
Maximum Power Current	14.23A	14.32A	14.40A	14.44A

TEMPERATURE CHARACTERISTICS

NMOT	41±3°C	Temp Coefficient of ISC	+0.05%/°C
Temp Coefficient of VOC	-0.28%/°C	Temp Coefficient of Pmax	-0.36%/°C


PACKING CONFIGURATION

Modules/Pallet	36 Pieces	Modules/40'Container	936 Pieces
----------------	-----------	----------------------	------------


Packing Description 26 Pallets, Total=(36+36)x13=936 Pieces

CHARACTERISTICS

LP182*182-M-54-MH-400W



LP182*182-M-54-MH-400W



MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A

15 YEARS Quality Warranty

30 YEARS Power Warranty